



STING

Manual

Dear POWERPLAY customer,

You have just purchased a sophisticated product. We place great importance on the workmanship and the high quality of the materials used.

If you have any questions which are not answered in this manual, please do not hesitate to contact us directly (Tel: 00 49 8141 3 27 78 88) or your Powerplay dealer.

from

the POWERPLAY Team

Table of Contents

1. Disclaimer and exclusion of liability	1
2. For your safety.....	2
3. Features of the paraglider	3
3.1 Description of the STING	3
3.2 Who is the STING suitable for?	3
3.3 Connecting the STING to harnesses.....	3
3.4 Winch-towing	3
3.5 Description of the riser.....	4-5
4. Setting up the STING and test-flying.....	6
4.1 Laying out the paraglider and pre-flight check	6
4.2 Five-point check	6
4.3 The first flight	7
4.4 Adjusting the main brake lines	7
4.5 Adjusting the speed system	8
5. Motorised flight.....	9
5.1 Normal flight	9-10
5.2 Rapid descents.....	10-12
6. Flying without a motor	13
6.1 Normal flight	13
6.2 Rapid descents.....	14
6.3 Instructions for extreme flying and dangerous situations	14-16
7. Looking after your paraglider	17
7.1 Transporting and storing the paraglider	17
7.2 Checking the lines	17
7.3 Cleaning and repairing the paraglider	18
8. Inspection.....	19
9. Warranty	20
10. Internet product information and safety notices	20

1. DISCLAIMER AND EXCLUSION OF LIABILITY

Use of this paraglider is solely at the USER'S OWN RISK. THE CERTIFICATION AND THE WARRANTY SHALL BE RENDERED INVALID if changes of any kind (including changes to the brake lines) or improper repairs are made to this paraglider or if any inspections are missed (annual and 2-yearly check).

Pilots are responsible for their own safety. Before every flight, the pilot must check the glider's airworthiness and must launch only if it is fit to fly. The pilot must check the weather forecast and only fly if both current and forecasted conditions guarantee a safe flight.

The glider may only be used with a pilot's licence which is valid for the area or under the supervision of an approved flying instructor. There shall be no liability on the part of third parties, in particular the manufacturer and distributor.

In terms of the warranty and guarantee conditions, the paraglider may not be flown if any of the following situations apply:

1. the inspection period has expired, you have carried out the inspection yourself, or the inspection has been carried out by an unauthorised inspector;
2. the take-off weight does not fall within the permissible overall take-off weight range;
3. the glider is flown in rain (inclusive drizzle) or cloud or when there is fog or snow;
4. there are turbulent weather conditions or wind speeds higher than 15 km/h;
5. the glider is used for aerobatics / extreme flying or flight manoeuvres at an angle greater than 90°;
6. the pilot has insufficient experience or training;
7. the wrong equipment or inadequate equipment (reserve, helmet, footwear etc) is used;
8. the glider is used for winch launching using a winch which has not been inspected or by non-licensed pilots and/or winch operators;
9. modifications have been made to the canopy, lines or risers which have not been approved;
10. the glider is opened in free fall - this is not a parachute.

2. FOR YOUR SAFETY

- Ø The use of paragliders is subject to various regulations. They may not be flown without a valid certification. Any attempt to fly is highly dangerous.
- Ø This manual does not replace the need to attend a paragliding school.
- Ø The paraglider may only be used for the purpose for which it is designed. Please do not use it as a parachute.
- Ø Use of the paraglider is at your own risk. The manufacturer is not legally responsible for any personal injury or material damage which occurs in connection with POWERPLAY paragliders.
- Ø A specialist must test-fly the paraglider. The test-flight must be recorded on the paraglider information label.
- Ø Do not under any circumstances tow your paraglider with a car, motorboat or any similar vehicle which is not fitted with a suitable towing system operated by an experienced winch operator.
- Ø Before towing, ensure that the winch operator has the appropriate training and licences.
- Ø Aerobatics are prohibited in Germany - check the situation in your country.
- Ø Flying with a wet canopy or when it is raining is prohibited; it may cause the glider to stall.
- Ø Do not under any circumstances alter the construction of your paraglider. If you do, any claims under the warranty will not be accepted and the certification will lapse.
- Ø When you fly for the first time, use training slopes only.
- Ø When flying, always wear a helmet, gloves, suitable clothing and shoes which protect your ankles.
- Ø Only fly if the wind speed, direction and weather conditions guarantee a safe flight.

This manual contains additional information concerning your safety. This information is indicated by two symbols.



Caution! Accident risk!

This symbol indicates risks which may arise. We also explain how to avoid the risk or how you should react if the situation arises.



Tip

This symbol is used when we give advice on correct handling of the paraglider, how to protect it from damage and general information.

3. FEATURES OF THE PARAGLIDER

3.1 Description of the STING

The STING is designed for pilots who fly paramotors or paramotor-trikes, and who also fly in thermal conditions or in dynamic lift and would like to avoid getting a second paraglider for this type of flying.

With its unique riser system and within the relevant weight limits (see Technical Data), the STING has classification with both the DHV and DULV (German Ultralight Association).

With closed trimmer and locked trimmer loop (see Description of the riser) the STING has DHV 1-2 classification and, even in free flight, has high performance with a high level of passive safety. In motorised flight, the pilot is able to increase the cruising speed using the trimmer and to counter the torque effect.

Furthermore, there is a choice of two hang points for the riser so that the STING can be best adapted to the particular motor used.

3.2 Who is the STING suitable for?

The STING is intended for a wide range of pilots, from the beginner to the safety-conscious cross-country pilot. Its high passive safety and straightforward handling are impressive, whether it is used with a motor or for free flight.

Classification

- DHV 1-2 GH
- DULV (suitable for schools).
- Take-off-weight (pilot + equipment + glider). The estimated weight of the equipment is about 20 kg.

3.3 Connecting the STING to other harnesses

The STING can be connected to any modern harness which has DHV "GH" harness classification. There is more information about this on the DHV website at www.dhv.de.

Harnesses with ample back protection are not suitable for flying with a motor. The harness used must be registered with the DULV, along with the paraglider and the motor.

F

Tip

The DHV tests paragliders with a distance between the harness carabiners (center to center) of 42 cm. Adjustments which differ from that (especially greater distances) can negatively affect the flying characteristics of your glider – stable spiral dive!

3.4 Winch-towing

The STING is suitable for winch-towing. Make sure that the brakes are unclipped when the paraglider takes off. Use weight-shifting to assist steering.

F Tip

Winch-towing is only recommended and permitted if:

- Ø the pilot has completed the appropriate training.
- Ø the winch and release used have a certificate of compliance which covers the towing of paragliders.
- Ø the winch operator has adequate training which includes the towing of paragliders.

3.5 Description of the riser

F

Attention!

Possible canopy collapses in turbulent air will become more dynamic as the take-off weight is increased. Decreasing the canopy's angle of attack by opening the trimmers will intensify this effect.

If the **take-off weight** for motorised flight is **more than 180 kg** (STING 250) the **trimmer may only be used to counter the torque effect** (a maximum of 3 cm on one side)!

Fully opening the trimmers to increase speed with a take-off weight of more than 180 kg is not permitted!

The STING riser is fitted with two hang points at different heights. The riser can be either long or short depending on the height of the motor, which ensures that the lines and the brake loops can be reached. If the brake handles are still hard to reach despite having chosen the right hang point on the riser (e.g. when the trimmer is open) then the main brake line can be fed through the lower pulley on the D-riser. For free flying we recommend using only the upper pulley at all times (factory setting for the brakes).

F Tip

It is crucial to ensure that changes to the brakes do not cause them to be activated when you don't want them to be. The paraglider should first be inflated and brought under control whenever the brake line position is changed.

Note that the available braking distance is shortened by using the lower pulley.

The trimmer allows the pilot to increase the cruising speed and to counter the torque effect. We recommend that you always have the trimmers closed when launching or landing.

F Tip


The speed bar must not be used in motorised flight.

DHV – riser adjustment:

The trimmer must be fully closed when flying without the motor, and the trimmer loops (shown in red) and the lower hang-point (red) must be attached in the harness carabiner in such a way that the trimmer cannot be opened during flight.

This is required for the glider to have DHV 1-2 classification.

Follow the diagram below.

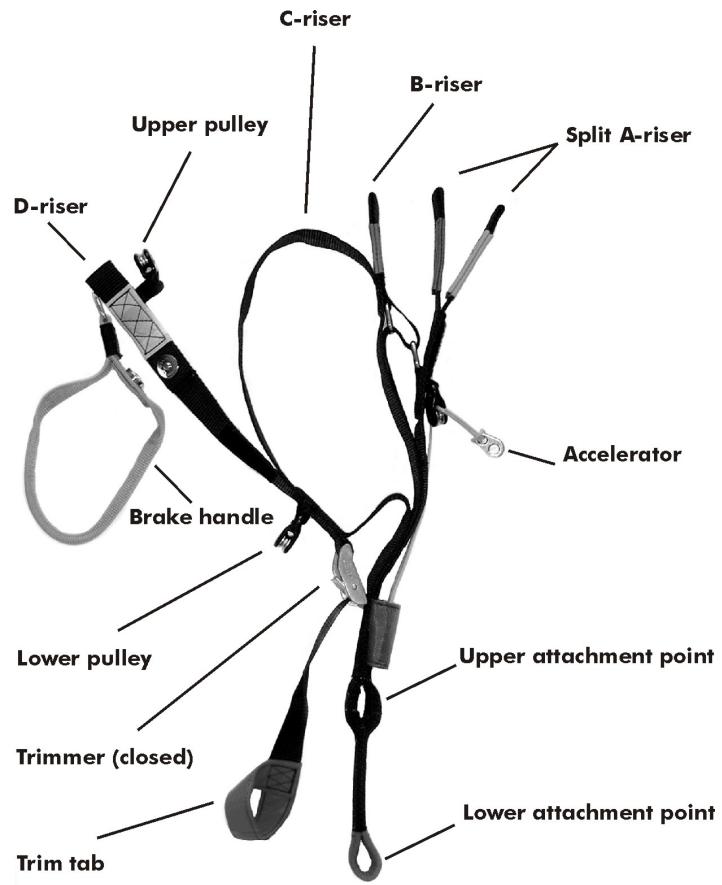

M

Caution! Accident risk when locking the trimmer loop (DHV adjustment)

It is most important that the trimmer is closed completely before locking the trimmer loop (red) in the harness carabiner. If it is not, there is a risk of deep stall because, with the trimmers fully or partly open, the C- and D-risers will be shortened in relation to the A- and B-risers.

4. SETTING UP THE STING AND TEST-FLYING

4.1 Laying out the paraglider and pre-flight check

Laying out the paraglider Place the paraglider with the upper surface against the ground and spread it out so that the leading edge is slightly curved.

Carefully separate all the rigging-lines and take care that no lines are underneath the canopy, tangled or caught up in any way.

The STING can be reverse launched easily with a wind speed of just 3m/s.

Pre-Flight Check **Before launching, always check the following:**

1. Are there any tears in the glider or other damage?
2. Have all the lines been untangled?
3. Are the brake lines clear and tightly connected to the handle?
4. Are the brake lines properly adjusted?
5. Are the quick links fastened securely to the lines and to the risers?
6. Is the canopy dry?
7. Are the risers and seams in good condition?
8. Is the harness in good condition?
9. Is the handle for the reserve chute secure?

4.2 5-point check

We recommend that you carry out the following 5-point check immediately before launching:

1. Is the canopy arranged in a half moon shape and are all the air-entrances open?
2. Are all the lines untangled? Are there any lines under the canopy?
3. Check your equipment: harness, carabiners, reserve, helmet. Are the leg straps done up?
4. Do the wind-direction and strength ensure a safe flight?
5. Are the airspace and launch area clear?

4.3 The first flight

F

Tip

Carry out your first few flights only when the weather is stable, and in a familiar area or on a training slope.

To start with, you should steer gently and carefully so that you can get used to the reactions of the paraglider while you are not in a stressful situation.

M

Caution! Accident risk!

Do not overestimate yourself! Don't let a paraglider that can easily be maneuvered or the behaviour of other pilots make you careless.

4.4 Adjusting the main brake lines

F

Tip

The main brake lines must be checked by an expert before the test-flight.

The main brake lines must be adjusted whenever you go from motorised flight to free flight and vice versa. Make sure the trimmers are closed when the adjustment is made.

Securing the main brake lines

The main brake lines must be fastened so that the mark is visible slightly above the knot (approx. 5mm).

Correct adjustment

Correctly installed brake lines have about 10 cm of feed. This is how far you must pull the brakes down before the trailing edge of the canopy starts to move downwards and the glider starts to brake. The manufacturer has pre-set the brakes with 10cm of feed, which means you are able to steer and land the glider with little time lag.

The length of the brake line is indicated by a reference mark at its lower end. This mark must be even with the ring of the brake handle. If the pilot has shorter arms, the length of the brake line can be extended in relation to the mark.

Too long

If the brake lines are too long, the paraglider reacts slowly and is difficult to land. However during the flight you can twist the brake lines around your hands to minimise this problem. Adjust the brake lines to a suitable length after you have landed.

M

Caution! Accident risk!


If the brake lines are too short, the following risks could arise:

- Ø the risk of early stall.
- Ø the paraglider does not launch well and there is a risk of deep-stall.
- Ø the paraglider's behaviour in extreme flying is dangerous.

4.5 Adjusting the speed system (for non-motorised flight)

Although the STING is already trimmed to a sufficiently high basic speed, it is also equipped with a speed system. This is used in particular if there is a strong headwind, when you fly over valleys or if you want to leave a dangerous area quickly.

Function The A-, B- and C-risers can be shortened by using the speed bar. This decreases the canopy's original angle of attack.

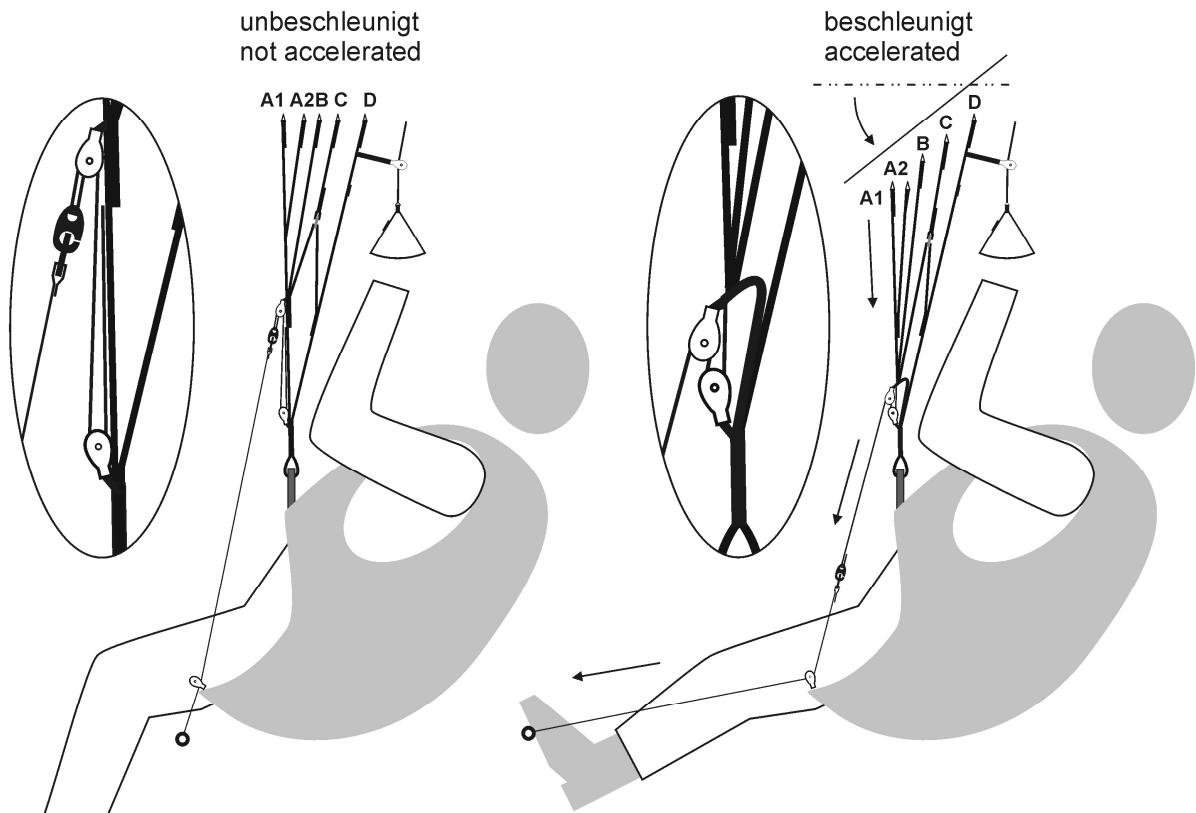

M

Caution! Accident risk!

Disturbances (e.g. collapses) are more dramatic with increased speed than when the glider is unaccelerated. Because of the increased risk of collapse, we strongly recommend that you do not use the speed system in turbulent areas or near the ground.

Test the system in advance. It is best to do this suspended from a frame. Tie the lines to the speed bar at the length which suits you. You should still be in a comfortable flight position even when the speed system is used to its full extent.

Adjustment

Do not make the speed system too short or you will not be able to access it easily. You will not be able to use the speed system to its full potential if it is too long.

5. MOTORISED FLIGHT

5.1 Normal flight

Launch The STING has excellent launch characteristics both with and without a motor. It has only a slight tendency to shoot forward and therefore needs little braking.

The glider should rise up without any delay and in a controlled way. In normal conditions, the STING rises smoothly and consistently through all stages of launch and this considerably facilitates the launch process.

If you are starting from a standing position, we recommend that you do not accelerate until the canopy has risen above the propeller wash. The motor thrust should be as horizontal as possible (pay attention to the position of your body).

The STING also has excellent rising behaviour and is easy to control when it is used with a paramotor-trike.

We recommend that you keep the trimmers closed when launching.

If the terrain is very steep and/or there is a head wind, the STING must also be gradually braked.

Cruising The STING is most efficient when cruising if the trimmers are in the open position. A trimmer can be closed again as much as is needed to counter the torque effect of the motor. The trimmers should not be used if there are very turbulent conditions, because the lower angle of attack causes the canopy stability to decrease.

Turns The STING has very balanced turn behaviour with great safety allowances in its steering.
Flat turns are just as easy as dynamic turns with high banking. Accelerate to compensate for the increased sink in the turn.
A little more brake is needed to counter torque effect if you want to achieve the same dynamics and banking as you get when turning in the direction of the torque.

F

Tip

Be careful when flying in your own wake!

Flying in turbulence Although there is less susceptibility to collapse with a motor running than in free flight because of the higher surface loading and the increased angle of attack, the trimmers should always be closed in strong turbulence.

When flying in turbulence, apply the brakes slightly (about 20%) and try to keep the canopy above you by actively working the brakes. This helps you to stop the tips of the wing collapsing. If a wing tip should nevertheless collapse, it is important to maintain your direction and steer away from any obstacles. You should not 'pump' the wing to make it reopen more quickly until your flight is stable again. This must be done somewhat more energetically because of the generally higher wing-loading with a paramotor.

When flying in strong thermals, release the brakes and reduce the motor's revs per minute so that you do not go into a dynamic stall. However, when you are leaving a thermal, brake the canopy well and increase the rpm so as to avoid pitching forward and a possible frontal tuck.

Tip: If you experience a collapse, counter-brake the canopy until you stabilise the glider in level flight. Too little counter-brake is better than too much.

Landing with stationary propeller You should not brake the STING too strongly before landing because of the comparatively high surface-loading. We recommend that you completely release the brakes in the final approach and then, when you are approx. 1-2m above the ground, gradually apply them until they are 100% on (flare).

Note that the length of the brake lines was set to the optimum level for your motor before the first flight so that there would be sufficient braking distance for landing.

Landing with motor running You have the option of using the motor to assist the landing approach. Your height and speed can be controlled using the brakes and the rpm until you touch the ground.

M Caution! Accident risk!

Always maintain sufficient speed when you are flying near the ground (well above the stall limit).

5.2 Rapid descents

There are many situations when you need to lose height rapidly to avoid potential dangers e.g. the up-current from a cumulus cloud, an approaching cold front, a storm front etc. Below we explain various ways to make a rapid descent which can also be carried out safely with a motor if the pilot has the necessary knowledge and if they are correctly executed.

F Tip

With all rapid descent methods, the trimmers should be completely closed and the rpm's reduced to zero.

All of the manoeuvres are more dynamic than when you fly without a motor because the take-off weight increases with the motor.

Spiral dives The spiral dive is the classic method for making a rapid descent with a sink rate of up to 14 m/s in normal flight situations, and up to 20 m/s in extreme flight situations. It is particularly suitable where there is a high ascent rate and little wind. Spiral dives with a sink rate above 14 m/s are not tested on certification; this exceeds the manufacturer's limits.

Starting the manoeuvre Whilst flying at full speed, start to apply the brake on one side. This will steer the paraglider into a turn with a strong bank. You can tell that you are in a spiral dive if you are being pressed hard against your seat (high centrifugal force). When you are in a spiral dive, you should steer very carefully because the paraglider will react immediately. Banking and rate of turn increase if braking efficiency increases. Look down before and during a spiral dive so that you can tell how far you are from the ground!

F Tip

There is an increased negative tendency when you begin the manoeuvre because of the torque effect of the motor.

Recovery	<p>Recover from the spiral dive slowly and carefully. If you release the brakes too quickly, the increased speed can cause the wing to climb, become unsettled, or partly collapse.</p> <p>Because of the reduced opportunity in motorised flight to use weight-shifting, you must always recover actively from the spiral dive with the outside brake.</p>
----------	---

M

Caution! Accident risk!

- Ø Very high turn speeds can be reached with spiral dives, with an increase in acceleration due to gravity. So be careful when you try this!
- Ø Do not continue the spiral dive too long; you could lose consciousness.
- Ø Never attempt this with less than 150 to 200 meters ground-clearance.
- Ø Spiral dives with "big ears" lead to extreme loading of the open section of the canopy. This move is prohibited in Germany.

<u>B-line stall</u>	The B-line stall is another way to descend rapidly and has a sink rate of approximately 8 m/s. It can be used where there is an average ascent rate and little wind, however, has limited use as a rapid descent method in motorised flight.
----------------------------	--

Starting the manoeuvre	Grasp both of the B-risers at the coloured mark. Pull them down slowly and evenly until the airflow is gone and the wing goes into a vertical descent flight mode. The B-risers should then be held in the same position to ensure a gentle descent.
------------------------	--

Check before and during the B-line-stall that the airspace beneath you is free.

Recovery	Return the B-risers to their normal position quickly and evenly. If you release the B-risers too slowly, a deep stall or negative spin could occur.
----------	---

M

Caution! Accident risk!

The canopy speeds up after the B-risers have been released. Under no circumstances should you apply the brakes at this time.

Do not under any circumstances accelerate when performing this manoeuvre – this could cause the lines to twist.

F

Tip

If the paraglider does not speed up immediately because recovery is too slow or for some other reason, accelerate using the speed system or pull the A-risers forwards.

Big ears "Big ears" is another way to descend quickly and has a sink rate of approximately 3 to 5 m/s. The forward speed stays the same. It is suitable for avoiding a dangerous situation where there are high ascent rates and strong wind.

Starting the manoeuvre Pull both outer A-risers downwards. You can now descend safely on the stable middle part of the wing. Steer by weight-shifting The brakes must not be applied during the manoeuvre, e.g. by wrapping the brakes.

Recovery The "ears" will usually open automatically when you release the A-risers. You can assist this by pumping the brakes.

M

Caution! Accident risk!

When the technique of "big ears" is used, there is a higher load for the line groups which are still weight-bearing. Do not fly any extreme manoeuvres with "big ears".

6. Flying without a motor

6.1 Normal flight



Tip

Pay attention to the riser set-up (see point 3.5).

Best glide Best glide is reached in calm conditions without using the brakes.

Minimal sink You will reach minimal sink with the brakes applied about 20-30%. More brake will reduce the forwards motion and increase the sink. This is often helpful when coming in to land. With flat turns in thermal conditions, both brakes should be applied and the radius of the circle corrected using the brake on the outside of the turn.

Turns As we said, the technique described above is suitable for flat turns. However, to enter a thermal or to achieve greater banking, brake on one side only. Even though the STING has no negative tendency, this should always be done carefully. Limited steering of the STING is possible using the rear risers if you are unable to steer using the brake lines. However, you should only do this in an emergency and take great care.

Flying in turbulence Use the brakes as described in point 5.1 (Flying in turbulence).

Deep stall In the test flights, we were not able to force a stable deep stall. However if the paraglider should go into a deep stall, quickly pull the A-risers down until the paraglider has resumed forwards motion again.

6.2 Rapid descent methods

Big ears

Start the manoeuvre and recover as described in point 5.2 (Big ears).

In free flight, when the "ears" have been folded in, the speed bar can also be used. This increases not only forward speed but also the sink rate. With sink rates up to 5 m/s and a speed of over 45 km/h, this manoeuvre is suitable for flying away from "sucking" clouds but, above all, for avoiding being forced into the lee when the wind is increasing. A positive side-effect is a noticeable increase in the stability of the canopy due to the higher surface loading.

Note: With "big ears", there is less braking distance until the glider stalls and the deep stall limit comes closer. The simultaneous activation of the speed bar counters these undesirable tendencies.

So you should always attach the speed system and also use it during big ears.

B-line stall

As described in point 5.2 (B-line stall). However, less effort is required to start the manoeuvre because the load is less.

Spiral dives

As described in point 5.2 (Spiral dives).

We recommend a small wing-over to start the manoeuvre if the all-up weight is low.

6.3 Instructions for extreme flying and dangerous situations

Dangerous situations

Extreme flying with a motor and full load are dangerous and therefore cannot be tested. They must be avoided at all costs.

Problems do not arise during a normal flight. However, pilot error during the flight or extreme wind conditions may leave the wing in an unusual flying position. This may require the pilot to make corrections during flight to which he is unaccustomed.

In this section we explain how to correct extreme situations if they do arise. The manoeuvres described below relate to the DHV-take-off weight (without motor).

F

Tip

These instructions do not replace safety training or specialised literature. We recommend that you undertake special safety training which will prepare you for extreme situations.

M

Caution! Accident risk!

Always keep within the recommended limits. Do not perform aerobatics or extreme flying manoeuvres, such as spirals with "big ears". This will prevent accidents caused by over-loading the glider.

Deep stall Various things can cause a paraglider to deep stall, e.g. shrinkage of the C and D lines as a result of dampness or flying in the rain. The airflow from the front of the glider gradually breaks away towards the back and the canopy sags, with the glider remaining upright. Paragliders are particularly susceptible to deep stalls if the wing loading is too low.

C and D lines which are too short, for example, can often be recognised because launch behaviour deteriorates.

You can recognise a deep stall because there is less flight noise than normal. In addition, your sink rate will increase (4-5 m/s).

Recovery Remain in an upright position and push the A- and B-risers in the direction you are flying, so as to shorten them by 5 to 10 cm.

If you have a speed system, simply use it to accelerate.

M **Caution! Accident risk!**

A wet canopy or flying in the rain increases the weight of the canopy and may cause a stall. You must not fly in these circumstances.

Front Stall Strong turbulence can cause part or all of the leading edge of the glider to fold or tuck under.

Normally the STING will immediately recover its normal flight position.

Recovery If the STING does not immediately recover from a frontal tuck, brake quickly and strongly with both steering-lines (brake lines) to re-inflate the glider.

M **Caution! Accident risk!**

If you are not able to avoid a front stall during motorised flight, do not under any circumstances accelerate - this can cause the lines to twist.

However, there is less risk of a front stall in motorised flight than in free flight because of the higher surface-loading and the increased angle of attack.

Asym. tucks In turbulence, one side of the paraglider may collapse. Some of the cells deflate and the paraglider could collapse or spin.

During test flights the STING self-recovered on release of the A-risers which were pulled down and caused the collapse. It turned less than 90° and stabilised on its own.

Recovery

- Ø Counter-brake slightly on the side of the paraglider that is still inflated to stop it turning away and to stabilise it.
- Ø Counter-brake just enough that the paraglider continues to fly straight ahead.
- Ø If the wing has not yet self-recovered, pump with the brake on the side that has collapsed in order to open it, making use of the full braking distance.

M **Caution! Accident risk!**

Counter-braking too strongly can result in a stall on the inflated side.

Full stall A full stall occurs if full brake is applied during the flight. The paraglider slows down, surges backwards and deflates. If the brakes are held down, the canopy comes up over the pilot again. The result is an almost vertical descent with a sink rate of about 8m/s.

Recovery Fully release the brakes within 3 seconds. If you release the brakes too slowly, the paraglider may spin. The spin stops automatically when the brakes are released completely.

M

Caution! Accident risk!

If the canopy has gone backwards, you must hold the brakes down, or the canopy can surge forward and, in an extreme case, end up underneath the pilot. Hold the brakes down until the canopy is above you again.

Spin

Spins occur when one side of the canopy stalls. The stalled part of the canopy continues to fly forward while the other side turns in the opposite direction.

Recovery Quickly release the brakes.

F

Tip

If the spin does not stop:

1. Check whether you have released the brakes fully.
2. If this does not work, use your reserve.

M

Caution! Accident risk!

In strong turbulence, always keep far enough away from rock faces and other obstacles. You need time and enough height to recover from extreme situations.

7. LOOKING AFTER YOUR PARAGLIDER

7.1 Transporting and storing the paraglider

Transport Always transport your paragliding equipment in the special backpack and/or in the inner bag.

Storing Store all of your paragliding equipment away from UV light in a dry room which is well- aired and has a constant temperature. Open the backpack and/or inner bag and the belt a little so that air can get in.

F

Tip

- Ø Sunlight, warmth and humidity can damage your equipment.
- Ø Temperatures lower than -10°C and higher than +50°C can make the wing unfit to fly. The manufacturer's warranty will not apply if the paraglider is not stored at the correct temperature.
- Ø Never store a paraglider which was packed up while still wet.

If the paraglider gets wet, spread it out so that air reaches all parts of it. Since the fibres absorb water, it can take several days until it is completely dry. If a paraglider is stored wet, it can become unsuitable for flying after a short time.

7.2 Checking the lines

Measuring Measuring the length of the lines is part of the regular inspection.

The lines must be measured with a load of 5kg to get comparable results. You will find the original line measurements under "technical data".

Have your paraglider checked every two years by the manufacturer or an authorised inspector. In Germany, pilots have been able to carry out the inspection themselves since 01.07.2001 provided that they follow all of the requirements. This is laid down by the German "Gütesiegel" certification.

F

Tip

We recommend an inspection every 50 to 100 flight hours or once a year.

7.3 Cleaning and repairing the paraglider

Cleaning Only clean the paraglider with a soft sponge and clean water.

Tip

F

Harsh chemical substances, high-pressure cleaners or steamers will destroy the surface layer. Clean the paraglider only if it is absolutely necessary.

Repairs Repairs should only be carried out by the manufacturer or a specialist recommended by the manufacturer.

You can repair small tears in the wing yourself (not at the seams) using the material recommended by the manufacturer, as long as they are in areas which do not bear heavy loads and they are not bigger than 3 cm.

Tip

F

Always replace lines that are damaged.

If you need to replace damaged or worn-out parts, use only original parts or parts that have been authorised by the manufacturer.

8. INSPECTIONS

General	Failure to observe the inspection periods will invalidate the warranty and certification. A properly completed logbook will help you to comply with the periods. There is more information on inspections and technical data in two separate booklets, both of which form part of this manual
	<ol style="list-style-type: none">1. Inspection instructions for Swing gliders (required only in Germany and Austria)2. Service papers (1 booklet for each size and model)
Inspection periods	In Germany, Swing gliders must be inspected as follows (check the situation in your country): A) <u>Gliders used by schools and tandem gliders (if used commercially) must be inspected (as for the 2-yearly check) every 12 months from the purchase date.</u> B) <u>Gliders for personal use and tandem gliders (not used commercially) must be inspected every 2 years from the purchase date.</u> C) The paraglider must be inspected after 150 hours of use (including ground handling) if this occurs prior to the periods in A and B above. Ground handling time must be at least doubled when working out the total hours of use because of the increased wear and tear on the glider.
Validity of inspection	If Swing is to accept guaranty and warranty claims, all inspections must be carried out by SWING, or an inspection agent authorised by SWING. The documentation and the result of the inspection must be clearly identifiable by the inspector (date and place / name of inspector) and be entered near the glider information/certification sticker.
Inspections by the pilot	Pilots in Germany have been able to carry out the inspection themselves since 01.07.2001. However, in this event, SWING's liability and warranty lapse. There are more details on inspections in a separate booklet (Swing paragliders inspection instructions).

9. WARRANTY

- General** The terms of the warranty are in the enclosed warranty card.
Please fill out the warranty card online within 14 days after you purchased your glider at www.swing.de → service → online-warranty.
After your registration you will receive a confirmation email. In case you don't have any e-mail address, please write info@swing.de in the mandatory field.
- The manufacturer must be notified immediately of any defects in the product, variations or changes in flight behaviour and any warranty claims and, if necessary, the glider must be made available for inspection by the manufacturer.

10. INTERNET – PRODUCT INFORMATION AND SAFETY NOTICES

- swing.de** Swing now sends relevant product and safety information by e-mail to all registered customers. If you would like to receive this, please register your name through our website.
- powerplay-gliders.de** Swing generally includes all e-mail addresses provided in the warranty cards in its distribution list. If you do not wish to be included, please do not give your e-mail address on the warranty card. We will not provide your e-mail address to any third parties.
- Our website: www.swing.de
- dhv.de** There is also data and information about our products on the DHV website www.dhv.de
dulv.de and the DULV website www.dulv.de.

We hope you have fun and many enjoyable flights

The POWERPLAY Team

Notes: